

High-Temperature Film Capacitors


Advanced Conversion has partnered with W.L. Gore & Associates to provide high-temperature film capacitors for operation up to 200°C while retaining long life and capacitance stability. These capacitors are offered in standard sizes ranging from 25uF to 100uF.

Mechanical Specifications:

Dimensions:	See layout drawing for details
Packaging:	Kapton® outer wrap encapsulated with epoxy
Connection Type:	Stranded silver-coated copper wire with PTFE insulation. Wires can exit from one or both sides.
Wire Termination:	Ends stripped of insulation
Wire Gauge:	See Part Numbering for details
Environmental Compliance:	RoHS

Electrical Specifications:

Capacitance:	See Part Numbering for details
Capacitance Tolerance:	±10%
DC Voltage Rating:	400 VDC
ESR:	< 120 mΩ typical
Operating Temperature:	-40°C to 200°C

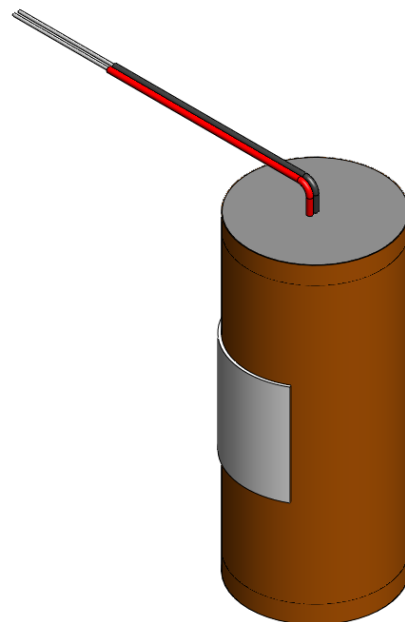

Part Numbering:*

803 1 G 030 -24 -2

Part Series	Revision	Film Type	Capacitance (uF)	Wire Gauge (AWG)	Wire Exit
803	1	G (GORE® High-Temperature Film)	25	24	1 (Exit on one side) (Only for 24 AWG option)
			30		
			40		
			50	OR	OR
			60		
			70		
			80	18	2 (Exit on both sides)
			90		
			100		

*Omit spaces when ordering, e.g. 8031G030-24-2

Marking:

Company Identification:

APCS

Part Number:

8031GXXX-XX-X

Capacitance value and Tolerance:

XXX uF ±10%

DC Voltage Rating:

400 VDC

Serial Number:


yyww-lot#-unit

(date code, lot number, serial number)

NOTES:

1. WIRE COLOR IS BLACK
2. WIRE COLOR IS RED
3. LABEL CONTAINS SERIAL NUMBER, PART NUMBER, AND REVISION

REVISIONS					
REV.	DESCRIPTION	CHG BY	CHK BY	APP BY	DATE
1	Initial Release	-	-	-	-

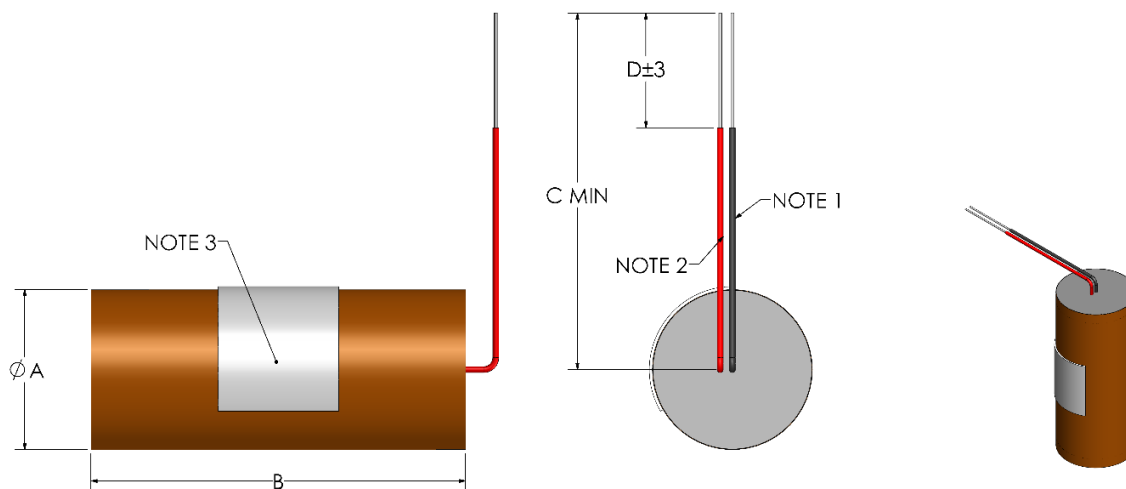

TO ORDER: ADVANCED CONVERSION 81 PARKER ROAD BARNET, VT 05641 USA Tel: 802.661.9450 ext. 104	
TITLE GORE 200C FILM CAPACITOR	
DWG. NO. 8031G	SHEET 1 OF 1
PROPRIETARY AND CONFIDENTIAL INFORMATION CONTAINED HEREIN IS THE PROPERTY OF ADVANCED CONVERSION AND WILL BE KEPT AS SUCH. IT IS TO BE USED ONLY FOR THE PURPOSES AND IN THE MANNER SPECIFIED HEREIN.	

Layout Detail:

Part Number	Capacitance (uF)	A (mm) ± 3.0	B (mm)	C (mm)	D (mm)
8031G025-XX-X	25	26	62	66	19
8031G030-XX-X	30	29			
8031G040-XX-X	40	34			
8031G050-XX-X	50	39			
8031G060-XX-X	60	44			
8031G070-XX-X	70	47			
8031G080-XX-X	80	50			
8031G090-XX-X	90	52			
8031G100-XX-X	100	54			

Revision Table		
Revision	Description	Date
Rev 1	Initial Release	11/1/2024
Rev 2	Include 25uF Standard Part	5/21/2025