

Power Ring Film Capacitor 1500 μ F, 600 Vdc

The 700D523 Power Ring is a 600Vdc, 1500 μ F DC Link Capacitor with an ESR of 100 micro-Ohms at 20kHz and an ESL of less than 5nH.



Electrical Specifications

Part #: 700D523

Capacitance/Tolerance: 1500 μ F \pm 10%

DC Voltage Rating: 600 Vdc

Dielectric/Construction: Metallized polypropylene. Single section design

Dielectric Withstand: Units 100% tested at DC potential of 750 Volts for two minutes at 25°C


ESL: Less than 5 nH when mounted on a suitable bus structure

Operating Temperature: -40°C to +85°C at full DC voltage rating


Voltage, Temperature De-rating: Contact Advanced Conversion for applications above 85°C

System Fault Current Rating (external to the capacitor): 10,000 Amps maximum

Typical ESR vs. Frequency:

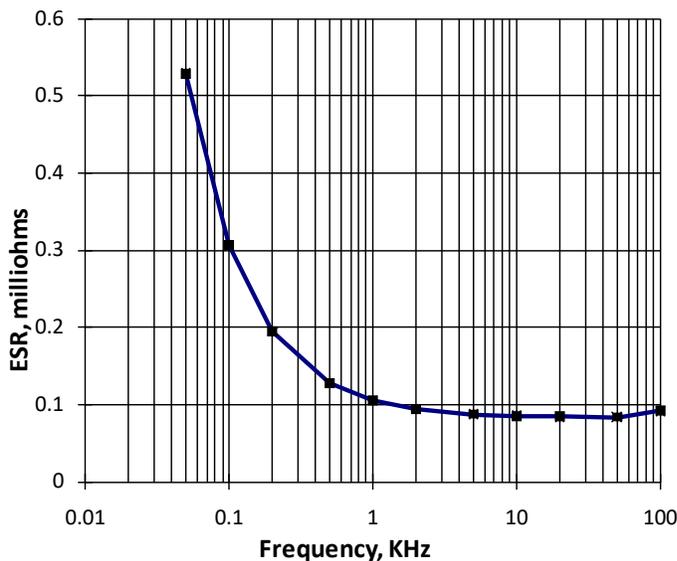

RMS Current Rating:

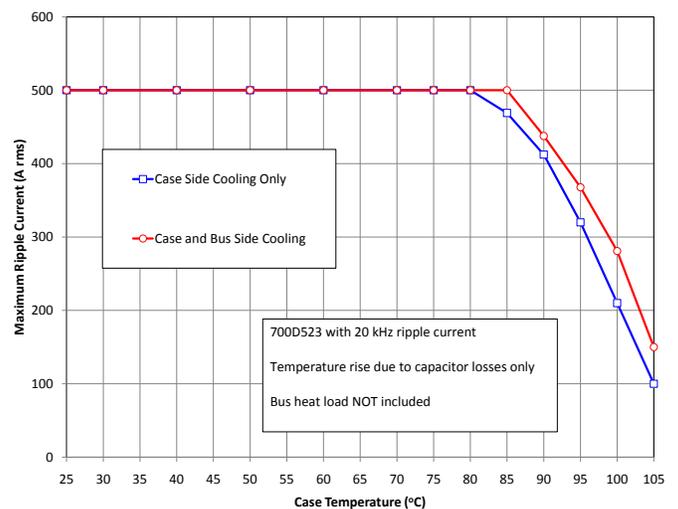

Advanced Conversion reserves the right to amend design data

Thermal Specifications


Here are two representations of “Capacitor Surface Temperature over Time” for two specific Thermal Resistances of 1°C/W and 0.5°C/W.

Notes regarding these graphs:

- The thermal resistance is that from capacitor to application. This is a function of the application environment, not the capacitor itself.
- The capacitor can handle extreme current for small duty ratios. Trise occurs very slowly. This is because the capacitor has a high specific heat.
- These charts can be adapted for other currents by multiplying y axis values for any time by $(I_{app}/300)^2$
- Internal capacitor Trise is added to the capacitor surface/terminal temperature.
- Terminals are assumed to be at case temperature.

Sample 1.

Capacitor surface temperature rise above application environment @ 300 Amps RMS current load, 10 KHz.
Thermal resistance = 0.5°C/W:

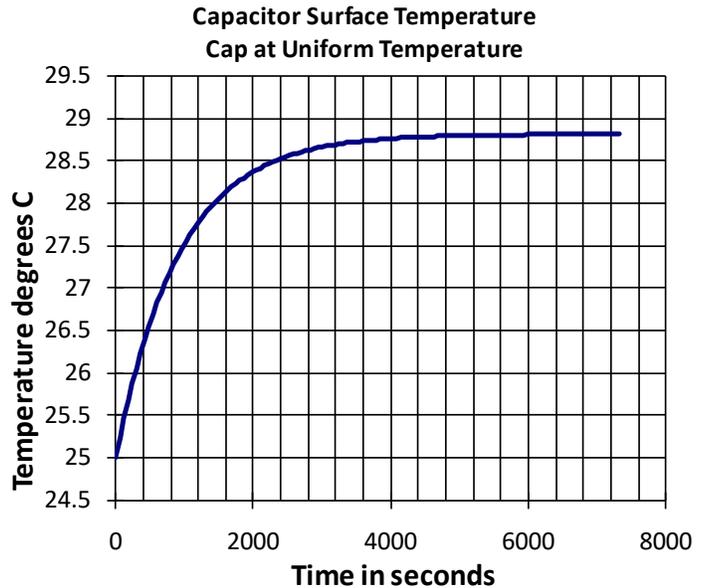


Mechanical Specifications

Dimensions:	Refer to layout details
Terminals:	Tin plated copper, 0.032" thick
Encapsulation:	Molded polymer case, potted with RTV
Marking:	
APCS	company identification
700D523	"short form" part number
1500 µF ±10%	Capacitance value and tolerance
600 Vdc	DC voltage rating
yyww-lot#-unit	12-digit serial number (date code, lot number, unit number)

Sample 2.

Capacitor surface temperature rise above application environment @ 300 Amps RMS current load, 10 KHz.
Thermal resistance = 1°C/W:

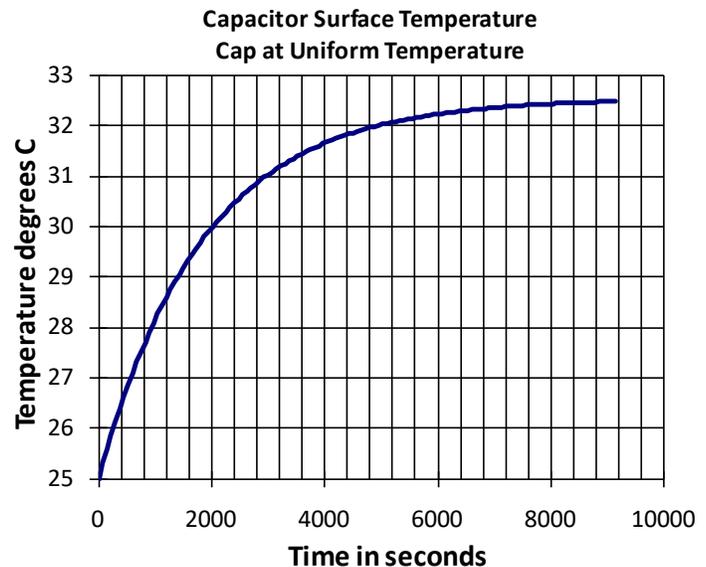

Mechanical Mounting and Additional Thermal Notes:

This capacitor is optimized for extremely low self inductance when connected to a suitable laminar bus structure. When so connected, the capacitor is very rigidly attached to such a structure and thus does not necessarily need to be mounted to a chassis. However, the capacitor case can be attached to an application surface/heat sink, etc. if desired. When so mounted, the capacitor can be part of the bus structure support. Use of thermal interface compound between the capacitor case and application surface/heat sink will assist with removal of capacitor and bus heat. Note

that the capacitor internal heating is VERY small, and other bus structure heat sources are very likely significantly higher than the heat added to the bus by the capacitor. Capacitor dissipation is approximately 7.5W at 300Arms, from 1-100KHz. It is highly recommended to use infrared thermal imaging from a system cold start to determine the location and relative magnitude of thermal input to the bus. The capacitor may well function as a thermal conduit for bus structure heat, and it will be very possible that the capacitor internal hot spot is less than the terminal temperature. Thermal contour maps are available for some representative conditions.

Layout Details:

Notes:

- All Hole Positions Inspected
- All Dimensions Inspected Unless Marked as Reference

Revisions					
REV.	DESCRIPTION	CHG BY	CHK BY	APR BY	DATE
01	Initial Release	-	-	-	-
02	Standardized Layout View	AGH	MGS	MSB	12/14/2010

Dimensions and Callouts:

- 7X 45.0° chamfered edges
- 22.5° chamfered edges
- Ø8.918 Bolt Circle
- Ø10.515 (Reference Dimension)
- Ø11.302 Bolt Circle
- Ø.259 ± 1.000 (Terminal Hole)
- 16X M5X0.8 - 6H THRU (Mounting Screws)
- 28 in-lbs MAX Torque (Mounting Screws)
- Ø10.796 Bolt Circle
- 4X Ø.197±005 THRU (Plastite Screws)
- 40 in-lbs MAX Torque (Plastite Screws)
- Ø.020 (Plastite Hole)
- Ø.020 (Screw Hole)
- Ø.030 (Tolerance)
- Ø.040 (Surface Flatness)
- 16 Surfaces (Surface Flatness)
- (.263) (Dimension)
- (2.157) (Dimension)
- (.663) (Dimension)
- (1.000) (Dimension)
- (.500) (Dimension)
- (.286) (Dimension)

DETAIL A SCALE 1 : 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADVANCED CONVERSION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADVANCED CONVERSION IS PROHIBITED. 02

NON-TOLERANCED DIMENSIONS ARE BASIC		UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES	
GEOMETRIC TOLERANCING PER: Y14.5-2009		DRAWN: AGH 12/1/2010	
CHECKED: MGS 12/3/2010		ENG APPR: MSB 12/3/2010	
MATERIAL:		FINISH:	

Advanced Conversion <i>an ETI company</i>	
81 PARKER ROAD, BARRE, VT 05641 USA Tel: 802.661.3450 ext. 104	
TITLE Power Ring Capacitor, 1500uF, 600VDC	
DWG. NO. 700D523LV	
DO NOT SCALE DRAWING	SIZE A
REV 02	SHEET 1 OF 1

Contact Advanced Conversion to discuss your specific requirements.

Advanced Conversion reserves the right to amend design data

At the Leading Edge of Film Capacitor Technology